

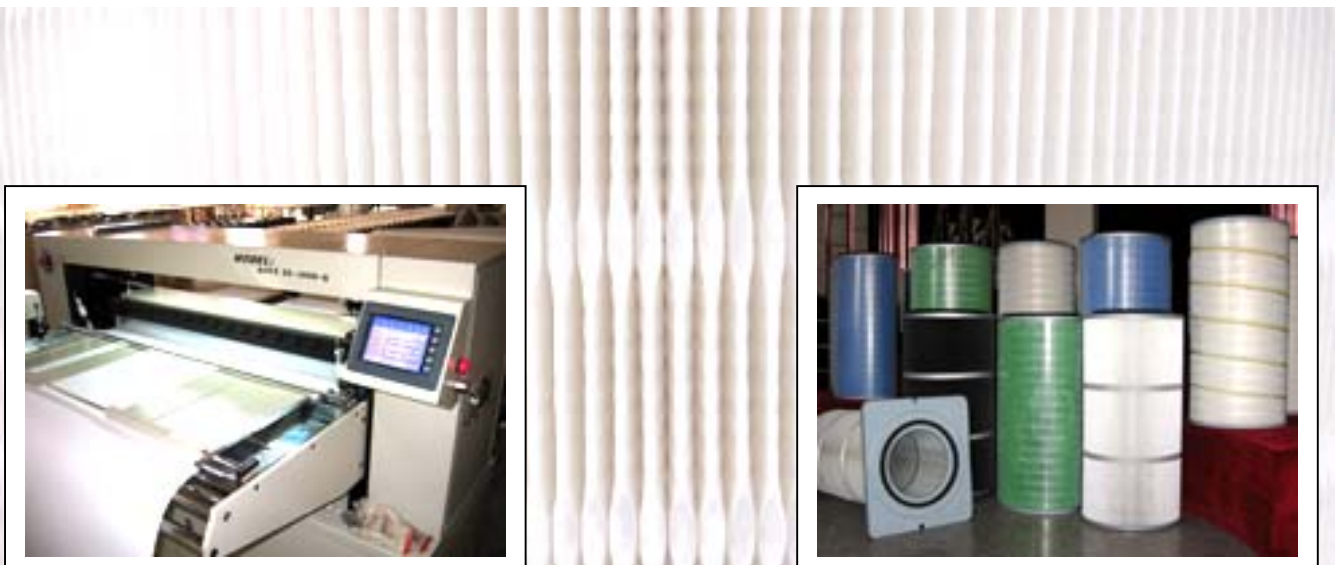


Filter Cartridge Construction

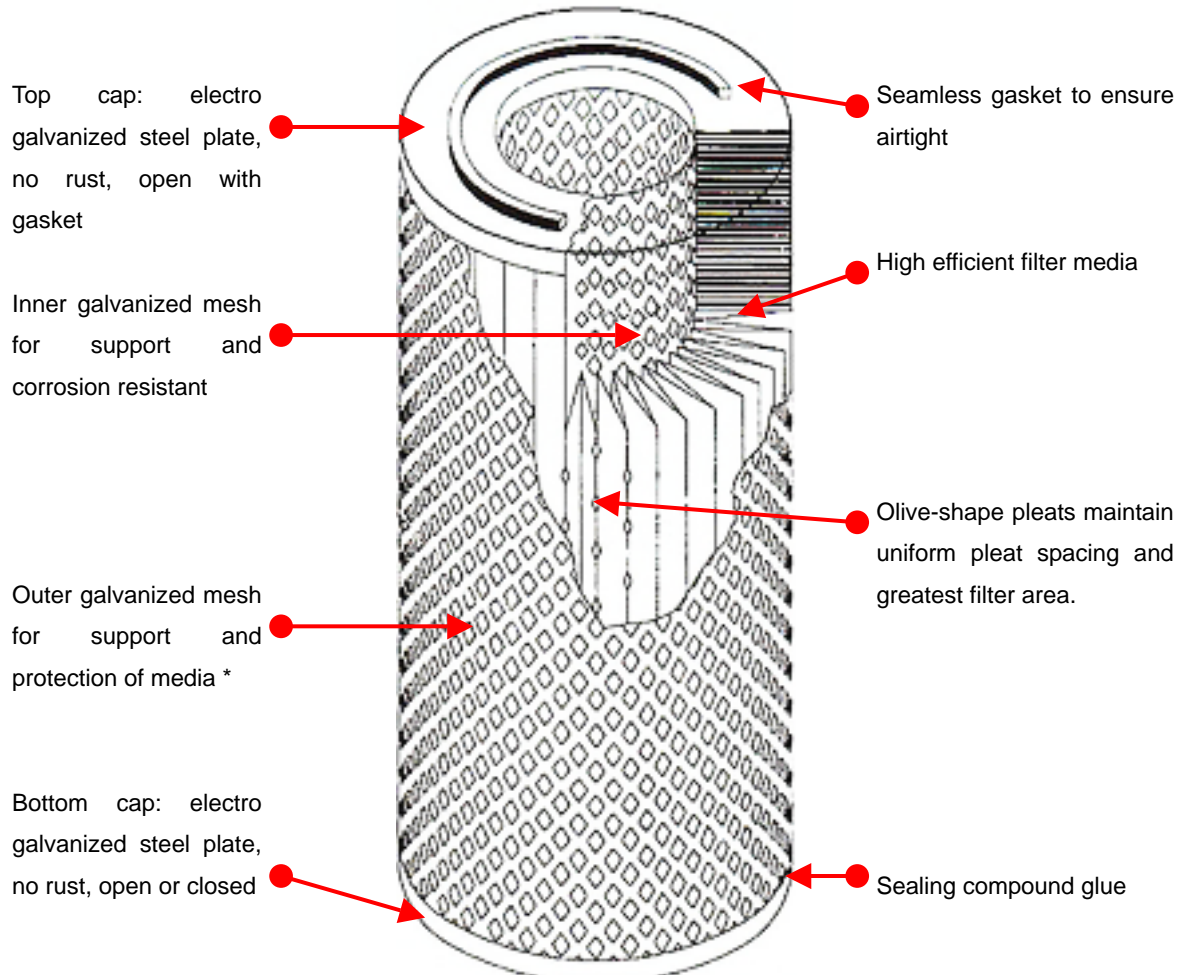

Cartridge Standard Configuration

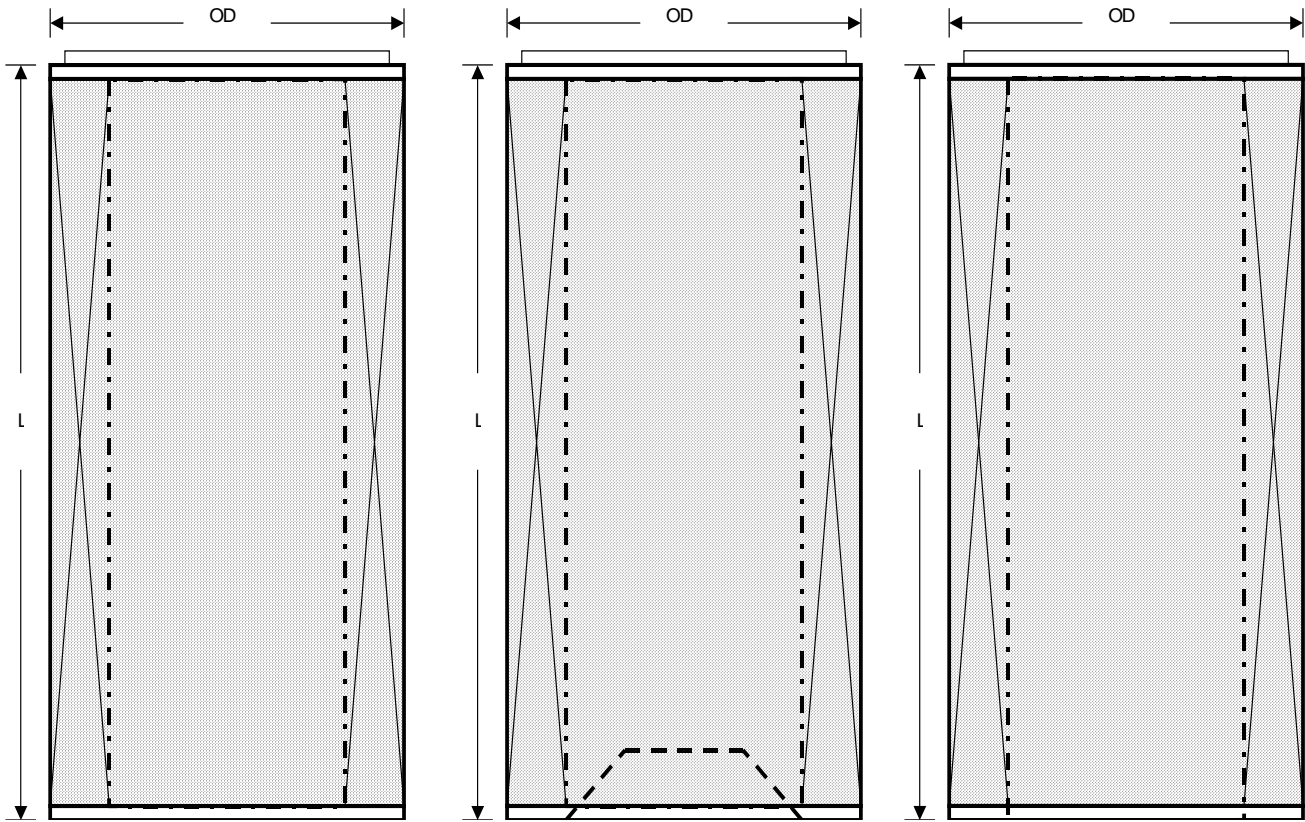

Close Bottom

(Hole Size 14, 16mm)

Cone Bottom

Open Bottom

Configuration Available:

Model	Media Type	O.D. (mm)	I.D. (mm)	L (mm)	Filter Area (m ²)
HS/Z3266	Cellulose	324	213	660	21.00
HS/Z3566	Cellulose	352	241	660	23.00
HS/Z3275	Cellulose	324	213	750	26.00
HS/Z3288	Cellulose	324	213	880	27.00
HS/Z3290	Cellulose	324	213	915	28.00
HS/P3266	Polyester	324	213	660	9.40
HS/P3566	Polyester	352	241	660	9.40
HS/P3275	Polyester	324	213	750	10.70
HS/P3288	Polyester	324	213	880	12.50
HS/P3290	Polyester	324	213	915	13.00

Both the size of the cartridge and the shape of the caps are available in various specifications to meet the optimum performance of your applications. Please contact us directly for more technical information.

Add: 1 GuoTai Road, Zhangjiagang, Jiangsu Province, China P.C.: 215600

Tel: +86-512-5868 5979 Fax: +86-512-5898 6893

www.industrialcleanair.com

Email: airmaxfilter@yahoo.com.cn MSN: fullcart@hotmail.com